

Precont® PU4SM

Universal pressure transmitter / pressure switch
for general industrial applications



Technical information TI04.24



Application

- Machinery and plant engineering
- Air-conditioning and refrigeration plant engineering
- Hydraulic and pneumatic systems
- Process industry
- Environmental technology
- Facility and building automation



Main features

- Measuring ranges from 400 mbar up to 1000 bar
- Wide variety of process connections
- Metallic front-flush or internal diaphragm
- Process temperature range -40°C to +125°C
- Fully welded robust steel enclosure
- High protection class IP69K/IP67
- Highest accuracy to ≤ 0,15%
- Electronic 4...20mA FSK / RS485 Modbus®-RTU / IO-Link®
- Certification ATEX / IECEx: Ex ia IIC Ga / Ex ia IIIC Da

Description

The device is an electronic pressure transmitter / pressure switch for monitoring, control and continuous measurement of pressures.

A high variety of versions of process connections and electronic types allows the use for a wide range of applications, also for demanding measuring requirements.

The front-flush process connection enables the cleanability of the wetted diaphragm to be integrated into the process.

Low-maintenance and trouble-free pressure measurement is thus also guaranteed in critical applications with viscose or also frequently changing media.

Due to its high accuracy and the digital adjustability by FSK, RS485 Modbus®-RTU or IO-Link® the device can be suited to a wide variety of applications.

The robust design and the high-quality workmanship turns the device into a very high quality product, which even the most adverse environmental conditions cannot affect, whether the lowest temperatures when used outdoors, extreme shock and vibration stress or aggressive media.

A captive laser marking of the type label ensures the identifiability throughout the entire lifetime of the device. Obviously is the optional marking of a measurement point designation resp. TAG, a customer label or of a neutral type label, of course also per laser marking.

A LABS- resp. silicone-free version, a factory calibration with calibration certificate and a customer specific configuration resp. preset is also optionally available like factory certifications for drink water suitability.

Customer specific special versions can be realized on request, e.g. special designs for the process connection or other process materials.



FEEL FREE TO
CONTACT US

Lauterbachstr. 57, D - 84307 Eggenfelden

info@acs-controlsystem.com

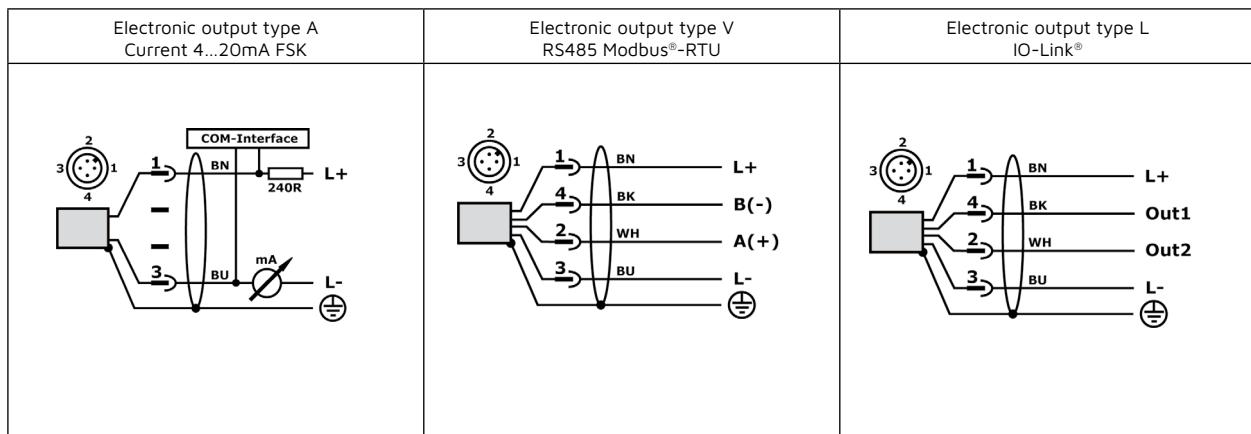
www.acs-controlsystem.com

+49 8721-96680



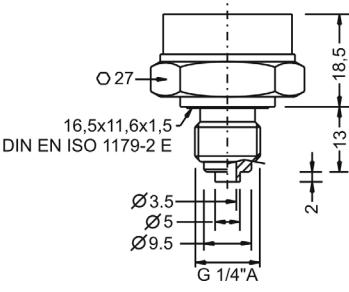
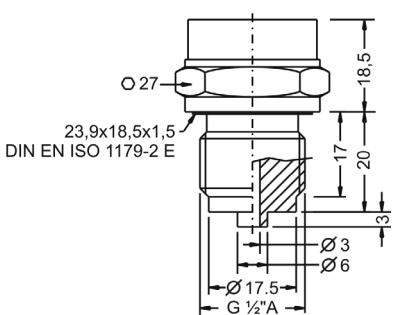
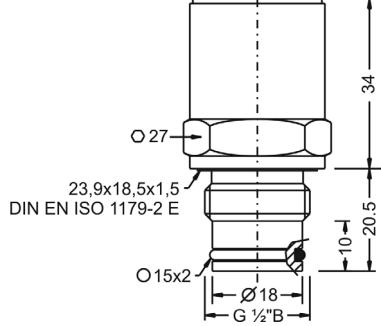
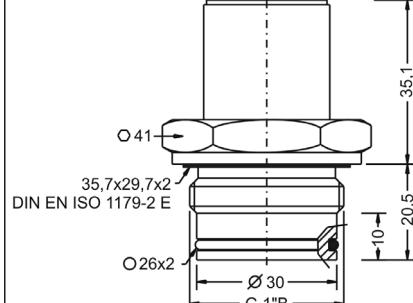
Technical Data

Measuring range										
Nom. pressure PN rel.	[bar]	-1...0	-1...1	0...0,4	0...1	0...4	0...6	0...10	0...16	0...20
Output type A – Current 4...20mA FSK										
Analogue output 4...20mA	3,9...20,5mA / \geq 3,8mA / \leq 22mA / $dI \leq 1\mu A$									
Time behavior	$T90 \leq 8ms (t_d = 0s)$ / $t_{on} \leq 0,2s (t_d = 0s)$									
Interface	FSK / 1200 Bit/s									
Output type V – RS485 Modbus®-RTU										
Interface	RS485, bidirectional / Modbus®-RTU / 9600 Baud (4800...38400 Baud)									
Input resistance	112kΩ									
Time behavior	$T90 \leq 2ms (t_d = 0s)$ / $t_{on} \leq 0,1s (t_d = 0s)$									
Output type L – IO-Link®										
Interface	IO-Link® V1.1 / Com2 (38400 Baud)									
Analogue output	0...20mA: 0...20,5mA / \leq 0,05mA / \leq 22mA / $dI \leq 1\mu A$ 4...20mA: 3,8...20,5mA / \geq 3,6mA / \leq 22mA / $dI \leq 1\mu A$									
Switch output	2x PP (Push-Pull), switch to +L/-L									
Time behavior	$T90 \leq 2ms (t_d = 0s)$ / $t_{on} \leq 0,1s (t_d = 0s)$ / $t_{rise} < 30\mu s$ ($RL < 3k\Omega$ / $I_{out} > 4,5mA$)									
Auxiliary power										
Supply voltage Us polarity protected Residual ripple voltage Supply current	Type A – 4...20mA FSK: 9...35VDC / $\leq 2V_{pp}$ / $\leq 22mA$ Type A – 4...20mA FSK Ex: 9...30VDC / $\leq 2V_{pp}$ / $\leq 22mA$ Type V – RS485 Modbus®-RTU: 6...35VDC / $\leq 2V_{pp}$ / $\leq 10mA$ (no load) Type L – IO-Link®: 9...35VDC, without IO-Link® / $\leq 2V_{pp}$ / $\leq 20mA$ (no load) Type L – IO-Link®: 18...30VDC, with IO-Link® / $\leq 2V_{pp}$ / $\leq 20mA$ (no load)									
Measuring accuracy										
Characteristic deviation	$\leq \pm 0,15\% / \pm 0,5\% FSO$ (TD=1)									
Long term drift	$\leq \pm 0,2\% FSO / \text{year}$ (TD=1)									
Temperature deviation	Tk Zero+Span (TD=1) $\leq \pm 0,02\% FSO/K$ (-20°C...+85°C) $\leq \pm 0,03\% FSO/K$ (-40...-20°C / +85...+125°C)									
Process conditions										
Process temperature	Standard: -40°C...+100°C / ATEX/IECEx: see certificate Extended: -40°C...+125°C / ATEX/IECEx: see certificate Gasket NBR: max. -20°C...+100°C Gasket FPM: max. -25°C...+125°C Gasket EPDM: max. -40°C...+125°C									
Pressure cycles	≥ 100 Mio. (1,2xPN)									
Environmental conditions										
Environmental temperature	-40°C...+100°C / ATEX/IECEx: see certificate									
Protection level	IP69K/IP67 (EN/IEC 60529)									
MTTF	463 years									

Electrical connection



Dimensions (mm)

Terminal enclosure		Temperature decoupler Extended temperature range
		
Process connection type 6 Thread G 1/4" A, EN 837	Process connection type 1 Thread G 1/2" A, EN 837	
 <p>DIN EN ISO 1179-2 E</p>	 <p>DIN EN ISO 1179-2 E</p>	
Process connection type 0 Thread G 1/2" A, front-flush	Process connection type 5 Thread G 1" A, front-flush	
 <p>DIN EN ISO 1179-2 E</p>	 <p>DIN EN ISO 1179-2 E</p>	

Order code

Type
PU4S Standard

Measuring system – material diaphragm (process wetted) / sensor type

M CrNi-steel / strain gauge

Approval

S Standard
X ATEX II 1 G / IECEx Ex ia IIC Ga resp. ATEX II 1 D / IECEx Ex ia IIIC Da (Output type – A)

Process connection

6 Thread ISO 228-1 – G $\frac{1}{4}$ "B, EN 837 manometer (without process gasket)
1 Thread ISO 228-1 – G $\frac{1}{2}$ "B, EN 837 manometer (\geq 40 bar without process gasket)
0 Thread ISO 228-1 – G $\frac{1}{2}$ "B, front-flush, O-ring gasket
not for measuring ranges 0...400 mbar / 0...1 bar / -1...0 bar / 0...1000 bar
5 Thread ISO 228-1 – G1"B, front-flush, O-ring gasket
for measuring ranges 0...400 mbar / 0...1 bar / -1...0 bar
Y others

Material process gaskets (process wetted)

0 without / NBR – nitrile-butadiene-rubber
1 FPM – fluorelastomere (e.g. Viton®)
3 EPDM – ethylene-propylene-dienmonomere, FDA-listed
Y others

Material process connection (process wetted)

V CrNi-steel

Material terminal enclosure

C CrNi-steel

Measuring range

03 0...400 mbar
05 0...1 bar
08 0...4 bar
09 0...6 bar
10 0...10 bar
11 0...16 bar
12 0...25 bar
13 0...40 bar
14 0...60 bar
19 0...100 bar
20 0...160 bar
21 0...250 bar
22 0...320 bar
23 0...400 bar
24 0...600 bar
25 0...1000 bar, only for process connection type 1, 6 – G $\frac{1}{2}$ "B, G1"B (EN 837)
16 -1...0 bar
17 -1...+1 bar
YY Special measuring range

Electronic – output

A Current 4...20mA, FSK, 2-wire
V RS485 Modbus®-RTU, 4-wire
L IO-Link®, 1x current 0/4...20mA / 2x switch, 4-wire

Electronic – function

S Standard

Process temperature

0 Standard -40°C...+100°C
1 Extended -40°C...+125°C, temperature decoupler

Pressure type

R Gauge pressure
A Absolute pressure (\leq 25 bar)

Measuring system – accuracy

4 0,5%
8 Xcellence – 0,15%, linearization protocol

Electrical connection

S Plug M12x1

Additional options

-SF LABS-free, silicone-free / paint compatible version
-ML Measurement point designation / TAG – Laser marking
-WT Factory certification – drink water suitability
-KF Configuration / Preset
-WK Factory calibration – calibration certificate

Precont® PU4S

M

V

C

S

S